

5202  
5202F  
5202K

### Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- $\phi$  1-1/4" all brass touch style pop up drain assembly
- 1.2gpm (4.5 L/min) max flow rate


### Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant



5202K-SN shown

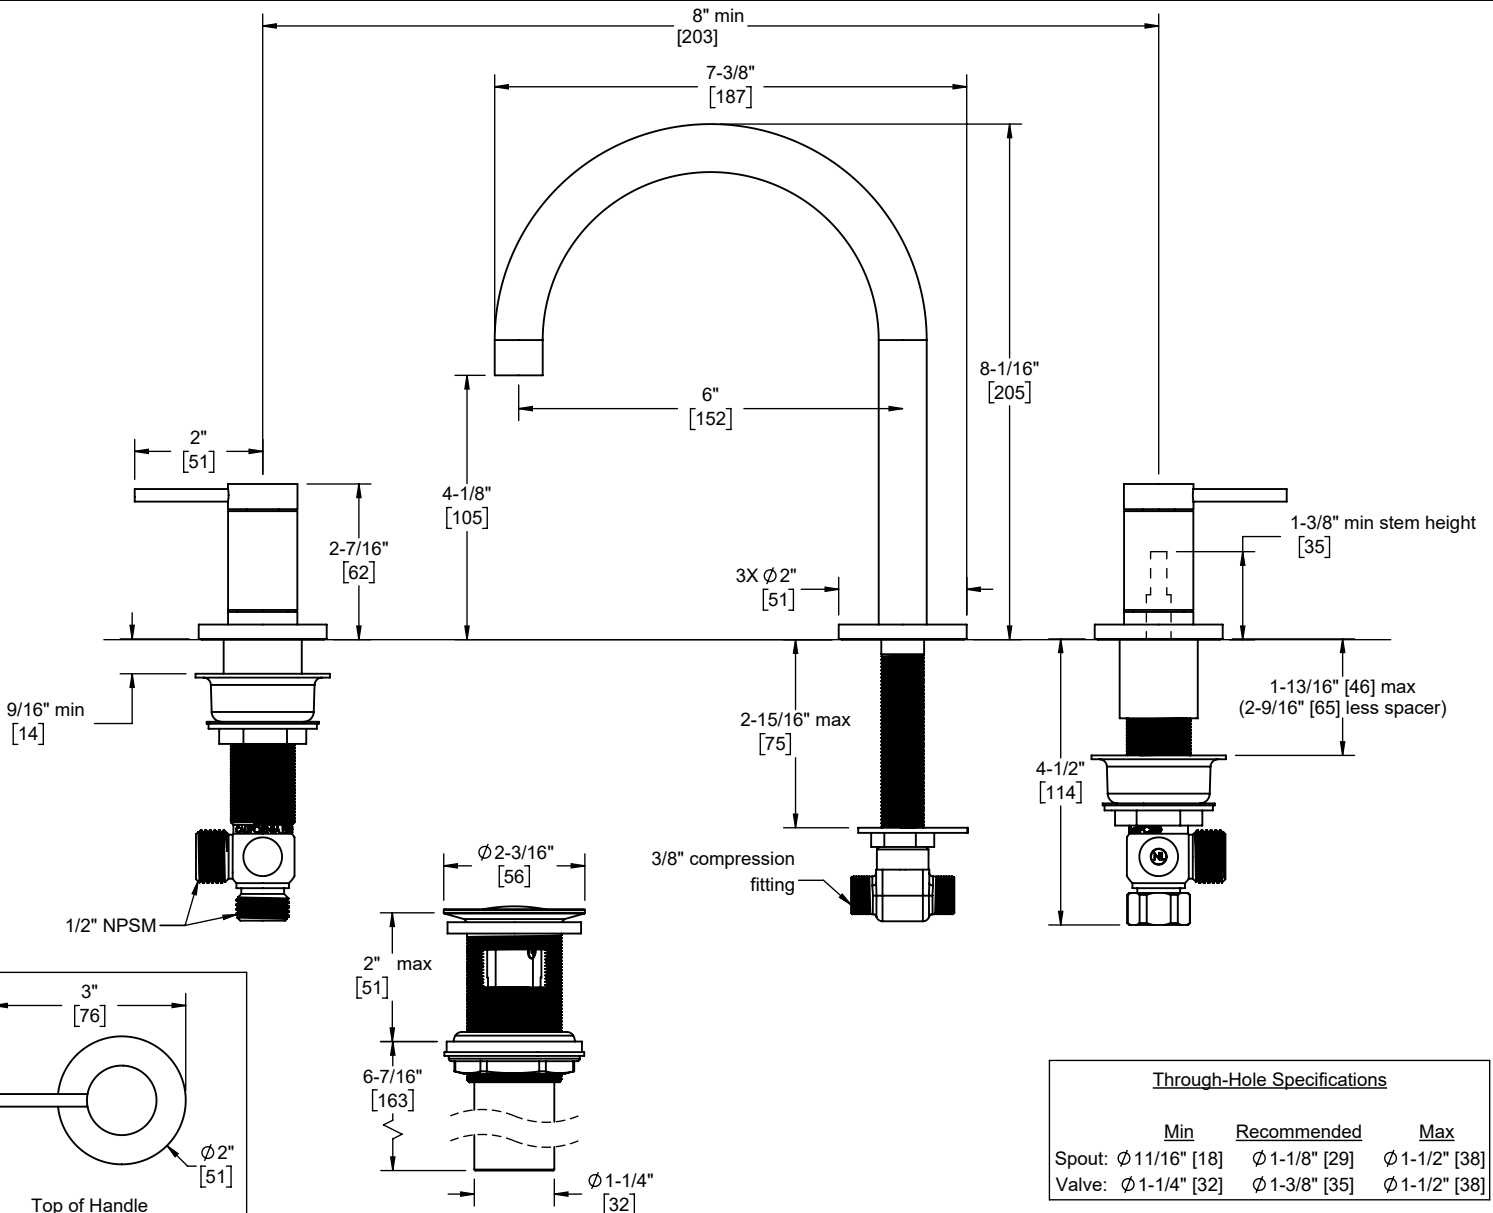

| Through-Hole Specifications |                    |                    |                    |
|-----------------------------|--------------------|--------------------|--------------------|
|                             | Min                | Recommended        | Max                |
| Spout:                      | $\phi$ 11/16" [18] | $\phi$ 1-1/8" [29] | $\phi$ 1-1/2" [38] |
| Valve:                      | $\phi$ 1-1/4" [32] | $\phi$ 1-3/8" [35] | $\phi$ 1-1/2" [38] |

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice