




STYLE No. **434732**  
 ITEM No. **18-53521-42448** (Chrome)  
**18-42298-48500** (Nickel)



CEILING VIEW



FRONT VIEW

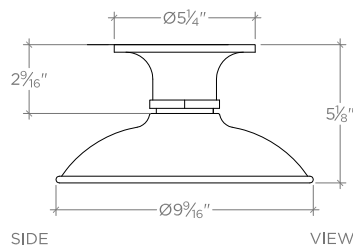

SIDE VIEW

**IMPORTANT:**

- **WARNING:** The power supply must be turned off prior to installation. Turn off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- This product is U.L. certified and is suitable for damp or dry locations. The U.L. listing mark can be found on the mounting plate.
- Be sure your installation conforms to all federal, state, and local codes.
- This product must be installed by a professional licensed electrical contractor.
- Refer to the specification and assembly drawings attached. Product is sold partially assembled but shown fully disassembled for illustrative and service purposes only.
- Max wattage for this product is 100 watts and is intended for use with half silver A19 incandescent light bulbs.


- Product is intended for incandescent light bulbs but is compatible with standard medium base fluorescent bulbs.
- Inspect this product to ensure you have all parts required for proper installation.
- Use only a strap wrench or protected/smooth-jaw wrench on any finished surface.

**INSTALLATION:**

- Fixture can be wall or ceiling mounted. Determine the desired orientation and install the required junction box:

Wall Mounted: 2" x 4" rectangular or 3½" octagonal.  
 Ceiling Mounted: 3½" octagonal. Junction box must be secured to adequate blocking or stud material to support the fixture weight.

1. Remove the mounting plate (11) from the fixture body (7) and ensure that the holes on the mounting plate align with the screw holes in the junction box.
2. Attach the mounting plate to the junction box using either the #8-32 (9) or #6-32 screws (10).
3. Remove the cover plate (6), the hex collar (5) and the knurled retaining ring (4) from the fixture body.
4. Pull the black and white fixture wires through the center hole in the mounting plate (11) and thread the fixture body (7) into the plate. Thread the body until the bottom face of the body is 3½" to 3⅝" from the finished wall/ceiling. Tighten the nut (8) against the plate to prevent the body from unthreading.

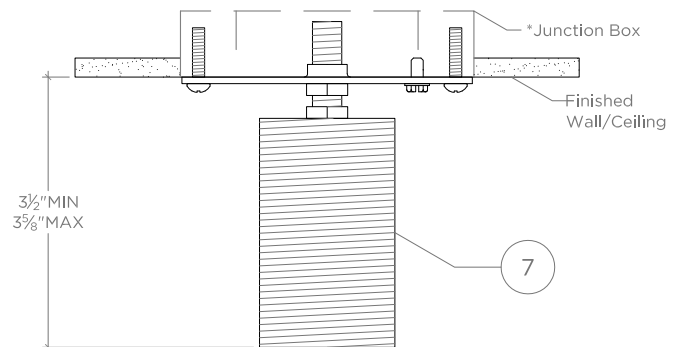**IMPORTANT:**

- Assemble the fixture before making final wiring connections to ensure that the metal and glass shades will be securely held in place.
- 5. Slide the cover plate (6) over the fixture body then the hex collar (5). Thread the knurled ring (4) onto the body (7) to hold the plate and collar against the finished wall/ceiling. **DO NOT OVER TIGHTEN.**

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**HENRY WALL/CEILING MOUNTED SCONCE (STYLE NO. 434732).**  
 All dimensions are based on origin specification and are subject to change and variation.  
 Please consult your Design Associate for current specifications.

**WATERWORKS**

6. Place the metal shade (3) over the glass shade (2) and slide the assembly over the fixture body. Thread the knurled retaining collar (1) onto the body.

7a.If the shades drops down when ceiling mounted or sag down when wall mounted, disassemble the fixture and thread the fixture body further into the mounting plate and repeat step 5 and 6.

7b.If there are not enough exposed threads to securely fasten the knurled collar (1), disassemble the fixture and unthread the fixture body from the mounting plate and repeat step 5 and 6.

7c.If the shades sit securely, disassemble the fixture and proceed to make the final wiring connections.

8. Fasten the bare copper fixture wire to the green or bare copper wire in the junction box or fasten it to the mounting plate (11) with the ground screw (12).

9. Fasten the white fixture wire to the white wire in the box with a wire nut. Tightly wrap the connection with electrical tape beginning 1" below the wire nut to ensure the tape seals the end of the nut. Make sure that there are no exposed wires that could cause a short circuit.

10.Repeat step 9 with the black fixture wire and the black wire from the junction box.

11. Slide the cover plate (6) over the fixture body then the hex collar (5). Tightly thread the knurled ring (4) onto the body (7) to hold the plate and collar against the finished wall/ceiling.

12. Place the metal shade (3) over the glass shade (2) and slide the assembly over the fixture body. Tightly thread the knurled retaining collar (1) on to body.

13. Install the light bulb (not supplied).

14. Turn on the power to the junction box at the fuse box/circuit breaker.

➤ If further assistance is required, please contact Product Support at 1-800-927-2120 Ext. 3 (9am-6pm EST).


ITEM NO.	DESCRIPTION	QTY.
1	Knurled Retaining Collar	1
2	Glass Shade	1
3	Metal Shade	1
4	Knurled Retaining Ring	1
5	Hex Collar	1
6	Cover Plate	1
7	Fixture Body	1
8	Nut	1
9	Mounting Screw, #8-32	2
10	Mounting Screw, #6-32	2
11	Mounting Plate	1
12	Ground Screw	1
13	Wire Nut	3

\* 100 Watt Half Silver A-19 Light Bulb Not Supplied

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**HENRY WALL/CEILING MOUNTED SCONCE (STYLE NO. 434732).**  
 All dimensions are based on origin specification and are subject to change and variation.  
 Please consult your Design Associate for current specifications.

**WATERWORKS**

\* Fixture can be wall or ceiling mounted. Determine the desired orientation and install the required junction box:  
 Wall Mounted: 2" x 4" rectangular or 3½" octagonal  
 Ceiling Mounted: 3½" octagonal

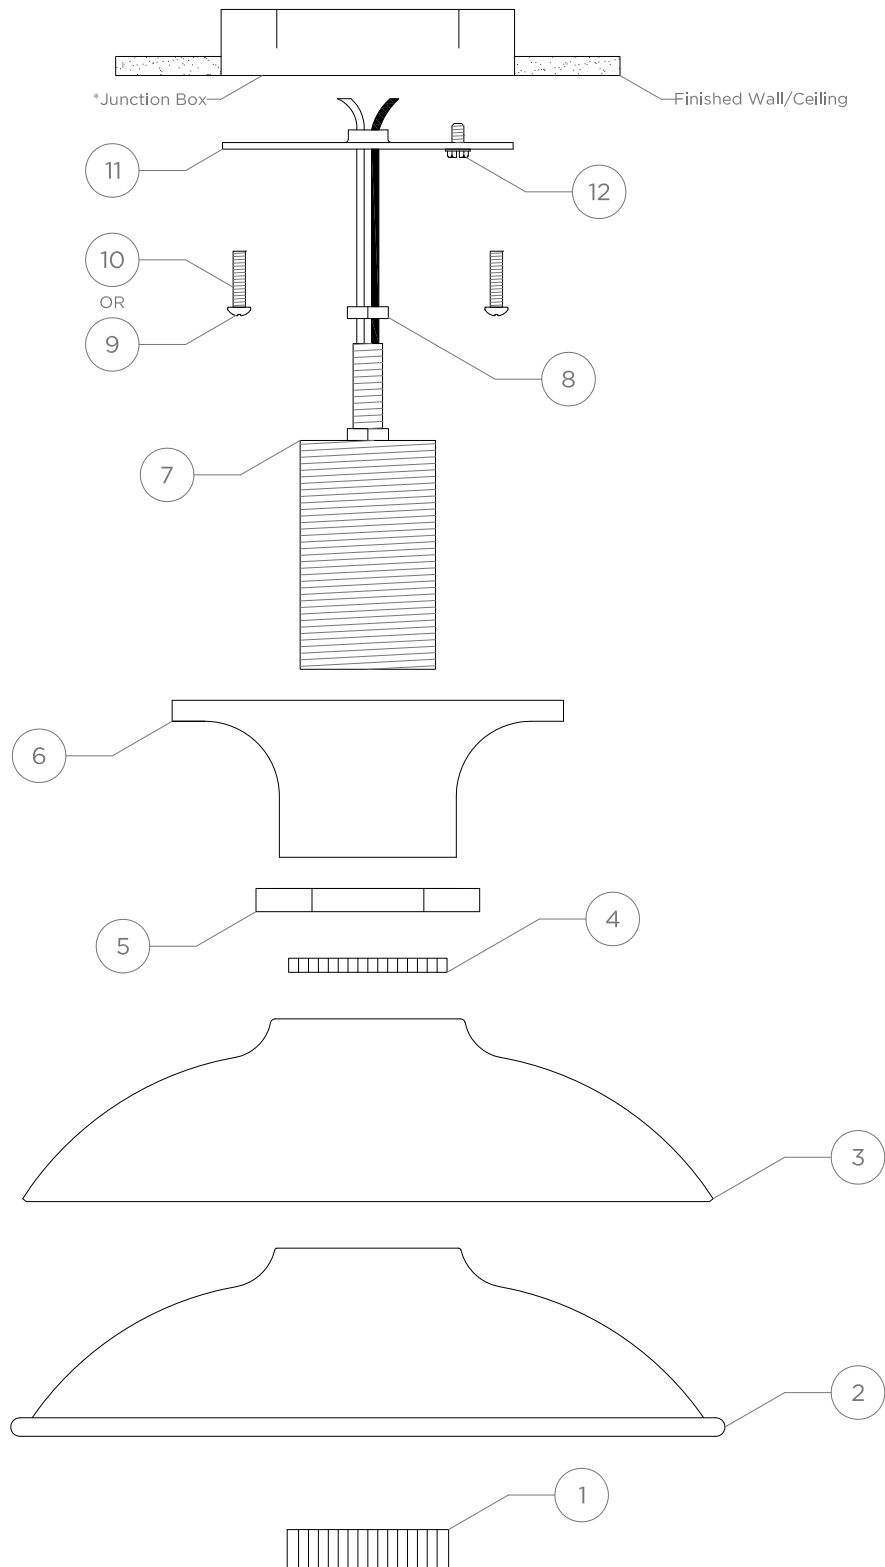

These guidelines have been prepared for the professional contractor to aid in the installation of:  
**HENRY WALL/CEILING MOUNTED SCONCE (STYLE NO. 434732).**  
 All dimensions are based on origin specification and are subject to change and variation.  
 Please consult your Design Associate for current specifications.

**WATERWORKS**