

HENRY

Henry Thermostatic Control Valve Trim with Metal Lever Handle

HNTH10



SHOWN IN HENRY THERMOSTATIC CONTROL VALVE TRIM WITH METAL LEVER HANDLE| HNTH10

TECHNICAL DETAILS

ADA Compliance: Yes
Control Valve Rough-in Depth Maximum: 3 3/4"
Control Valve Rough-in Depth Minimum: 2 1/2"
Diverter Valve Rough-in Depth Maximum: 4 1/8"
Diverter Valve Rough-in Depth Minimum: 2 7/8"
Fittings Hole Diameter: 5 1/4"
Depth / Width: 3 13/16"
Height: 6 1/2"
Integrated Diverter: N
Integrated Spray: N
Length: 6 1/4"
Number of Handles: One
Pivot: N
Primary Material: Brass
Spout Swivel: N
Spray Included in Unit: N
Suggested Application: Bath

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

Code # HNSV10: Code # HNSV10X: Complies with ASME A112.18.1/CSA B125.1 & ANSI A117.1 ADA. Certified with IAPMO, cUPC & State of MA

PRODUCT FEATURES


The manufacturing process encompasses casting, turning, forging, hand-fitting and hand polishing. Brass material is used for components.




HENRY

HNTH10


Henry Thermostatic Control Valve Trim with Metal Lever Handle



TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

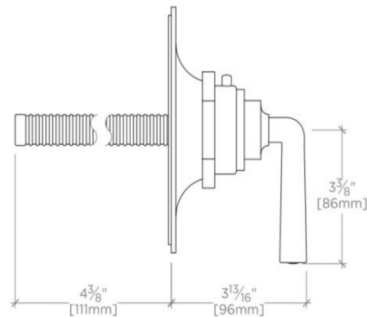

SIDE VIEW SCALE: 3"=1'-0"