### WATERWORKS

### R.W. ATLAS

### RWLS20

## R.W. Atlas Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Wheel Handles



#### **TECHNICAL DETAILS**

ADA Compliance: Yes Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 9/16" Deck Thickness Minimum: 3/8" Drain Depth Maximum: 2 5/8" Drain Hole Diameter: 1 3/4" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 1/4" Handle Spread Maximum: 12" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn Depth / Width: 8" Drain Depth Minimum: 3/8" Height: 4 3/8" Inlet Connection Size: 1/2" Inlet Connection Type: Male with Supply Nut Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 8" Installation Type: Deck Mounted Integrated Diverter: N Integrated Spray: N Length: 11 5/8" Number of Handles: Two Number of Holes: Three Hole Primary Material: Brass Restricted Maximum Flow Rate: 1.2 gpm Spout Swivel: N Spray Included in Unit: N Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

L SHOWN IN R.W. ATLAS LOW PROFILE THREE HOLE DECK MOUNTED LAVATORY FAUCET WITH METAL WHEEL HANDLES

#### **INSPIRATION**

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

#### **CODES & STANDARDS**

Code # RWLS20: Complies with ASME A112.18.1/CSA B125.1, ASME A112.18.2 / CSA B125.2, NSF 61, NSF 372, CEC, ADA and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, NSF, CEC, DOE, State of MA and WRAS.

#### **PRODUCT FEATURES**


Features tumbled barrels marked with an engraved H and C. Includes European push touch style drain. Meets or exceeds the Weighted Average Lead Requirements of 0.25%. Available in 1.2gpm (4.5L/min)

#### CERTIFICATIONS



## R.W. ATLAS

# R.W. Atlas Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Wheel Handles

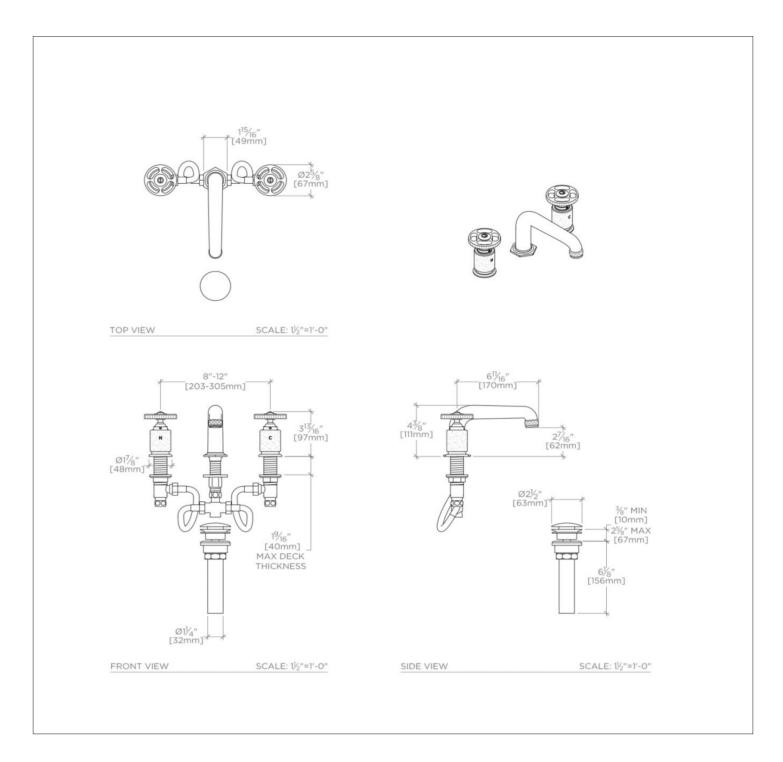

### RWLS20