
WATERWORKS

RW10TF R.W. ATLAS

R.W. Atlas Deck Mounted Low Profile Concealed Tub Filler with Metal Handshower and Metal Lever Handles

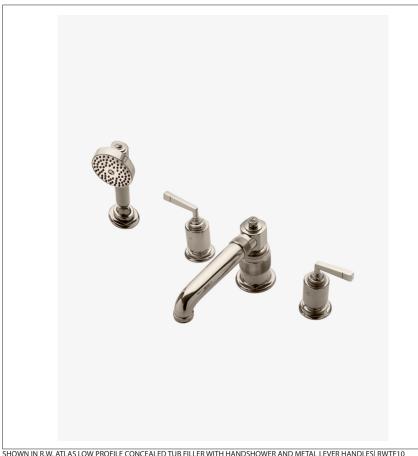

SHOWN IN R.W. ATLAS LOW PROFILE CONCEALED TUB FILLER WITH HANDSHOWER AND METAL LEVER HANDLES RWTF10

INSPIRATION

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

PRODUCT FEATURES

Features tumbled barrels marked with an engraved H and C with knurled detail on the spout. Integrated pull up diverter on spout.

Standard flow rate is 2.5 gpm for handshower only. Also available in high efficiency flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

TECHNICAL DETAILS

ADA Compliance: Yes Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 Deck Thickness Minimum: 3/8" Diameter of Head: 2 11/16" **Escutcheon Primary Material: Brass** Fittings Hole Diameter: 1 3/8" Flow Restriction Options: 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 12" Handle Spread Minimum: 10" Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 79" Depth / Width: 9 7/16" Height: 7 1/16" Inlet Connection Size: 3/4" Inlet Connection Type: Male G/BSPP Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 10" Installation Type: Deck Mounted Integrated Diverter: N Integrated Spray: N Length: 18 15/16" Number of Handles: Two Number of Holes: Four Hole Primary Material: Brass Restricted Maximum Flow Rate: 2.5 gpm Spout Swivel: N Spray Included in Unit: N Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 80.0 psi Water Pressure Minimum: 20.0 psi

Water Pressure Recommended: 45.0 psi









R.W. ATLAS RW10TF

R.W. Atlas Deck Mounted Low Profile Concealed Tub Filler with Metal Handshower and Metal Lever Handles

