
## **R.W. ATLAS**

## RWXS21

R.W. Atlas Exposed Thermostatic System with 8" Shower Rose, Arm, Metal Wheel and Lever Handles

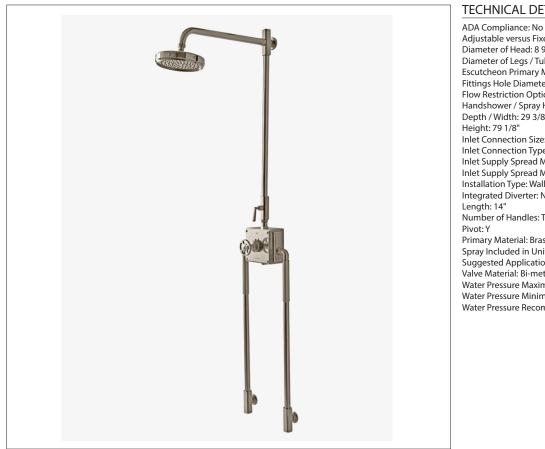

### **TECHNICAL DETAILS**

Adjustable versus Fixed Spray: Fixed Spray Diameter of Head: 8 9/16" Diameter of Legs / Tubes: 1 1/8" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1" Flow Restriction Options: 2.5, 2.0, 1.75, 1.5 Handshower / Spray Hose Length: 59" Depth / Width: 29 3/8" Inlet Connection Size: 3/4" Inlet Connection Type: Copper Compression Inlet Supply Spread Maximum: 11 3/4" Inlet Supply Spread Minimum: 11 1/2" Installation Type: Wall Mounted Integrated Diverter: N Number of Handles: Two Primary Material: Brass Spray Included in Unit: N Suggested Application: Bath Valve Material: Bi-metal Strip Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

L SHOWN IN R.W. ATLAS EXPOSED THERMOSTATIC SYSTEM WITH 8" SHOWER ROSE, ARM, METAL WHEEL AND LEVER

### **INSPIRATION**

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

#### **CODES & STANDARDS**

Code # RWXS20: Complies with ASME A112.18.1/CSA B125.1, ADA and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, and State of MA.

#### **PRODUCT FEATURES**

#### Built in Anti-scald protection.

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.





# R.W. ATLAS

## RWXS21

R.W. Atlas Exposed Thermostatic System with 8" Shower Rose, Arm, Metal Wheel and Lever Handles

