BOND BLS47E

Bond Union Series One Hole Lavatory Faucet with Guilloche Pinstripe Lever Handle



TECHNICAL DETAILS

ADA Compliance: Yes

Deck Thickness Maximum: 1 13/16" Deck Thickness Minimum: 1/4" Drain Depth Maximum: 2 5/8" Drain Depth Minimum: 3/8" Drain Hole Diameter: 1 3/4" Drain Style: Push Touch Fittings Hole Diameter: 1 3/8" Handle Turn Angle: Quarter Turn Inlet Connection Size: 3/8"

Inlet Connection Type: Compression Connection Hoses

Number Of Holes: One Hole Primary Material: Brass

Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: Y

Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN BOND UNION SERIES ONE HOLE LAVATORY FAUCET WITH GUILLOCHE PINSTRIPE LEVER HANDLE | BLS47E

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

PRODUCT FEATURES

Lever Handle

Includes Universal Push-Touch Drain (UNLD23) which fits 1-1/2" through 1-3/4" drain hole openings

Features Guilloche Lines combined with Pinstripe Handle

Stocked in Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate

CERTIFICATIONS







PRODUCT (NOTES)

BOND BLS47E


Bond Union Series One Hole Lavatory Faucet with Guilloche Pinstripe Lever Handle



TOP VIEW SCALE: 11/2"=1'-0"



HANDLE OPERATION





NOT TO SCALE BSPP ADAPTER †

9/16-24

UNEF

THREAD

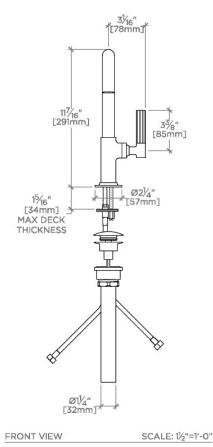

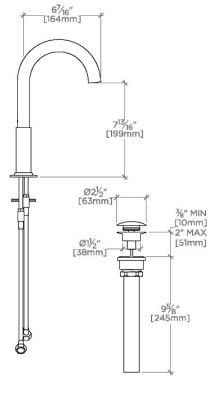

SIDE VIEW

SCALE: 1/2"=1'-0"