WATERMYRK


BROOKLYN, NEW YORK

Sutton
111-7.9-SP5
Deck Mounted Pot Filler

- 1/2"-14 NPS Male Connection at Bottom
- Recommended Mounting Hole: 1"
- All Lead-Free Brass Construction
- Flow Rate: 7.5 GPM
- 1/4 Turn Ceramic Cartridge
- Use With Cold Water Only
- 360° Rotating Spout
- Professional Installation Required
- Fits Deck Up To 3" Thick

Available in all finishes shown on the Watermark Designs website



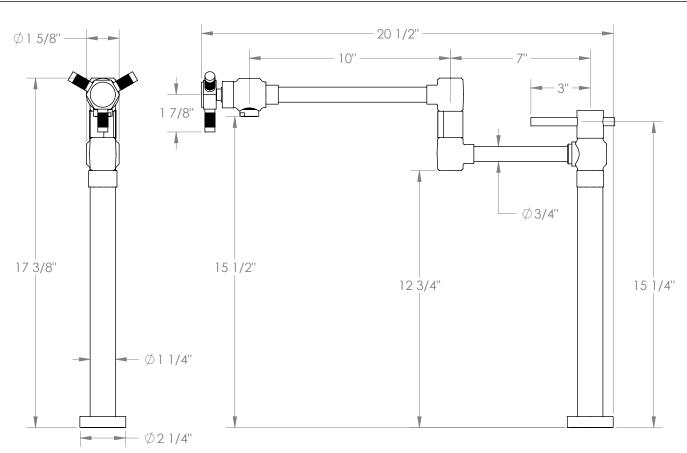

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to produce specifications. All product dimensions are nominal.