

HIGHGATE

Highgate Exposed Thermostatic System with 6" Shower Rose and White Porcelain Lever Handle

HGXS70



SHOWN IN HIGHGATE EXPOSED THERMOSTATIC SYSTEM WITH 6" SHOWER ROSE AND WHITE PORCELAIN LEVER HANDLE

TECHNICAL DETAILS

ADA Compliance: Yes
Adjustable versus Fixed Spray: Fixed Spray
Diameter of Head: 6"
Flow Restriction Options: 2.0, 1.75, 1.5
Inlet Supply Spread Maximum: 5 1/2"
Inlet Supply Spread Minimum: 5 1/2"
Installation Type: Wall Mounted
Primary Material: Brass
Suggested Application: Bath
Valve Material: Wax Element
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our take on old English style: simple, functional shapes, detailed with white porcelain indices and hexagonal accents for a timeless feel.

CODES & STANDARDS

Code # HGXS70Y: Certified with cUPC, NSF, IAPMO, CSA

PRODUCT FEATURES

Built in Anti-scald protection.

All finishes available for immediate shipment (subject to availability)

Add a handshower to this exposed system. Handshower not included.

Stocked in 2.0gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.




PRODUCT (NOTES)

Optional Handshower with Diverter (HGHS30) sold separately



HIGHGATE

HGXS70


Highgate Exposed Thermostatic System with 6" Shower Rose and White Porcelain Lever Handle

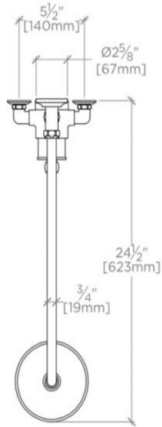

TOP VIEW SCALE: 1"=1'-0"

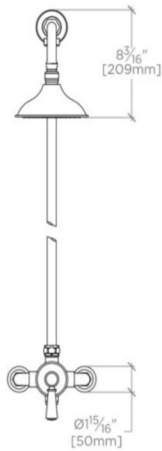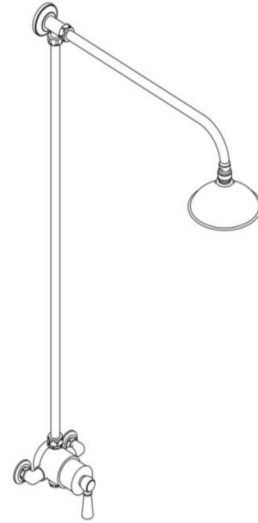

FRONT VIEW SCALE: 1"=1'-0"

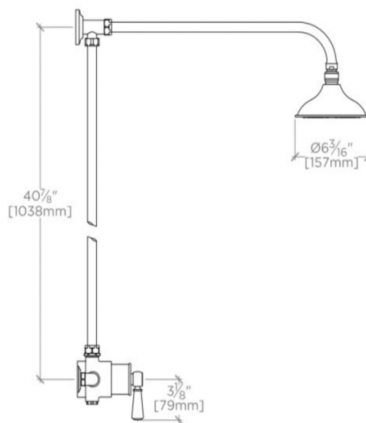

SIDE VIEW SCALE: 1"=1'-0"